




## TECHNICAL DATASHEET

# ASCOTITE LIQUID LOCK

2-Part, High Strength Multipurpose Epoxy Adhesives

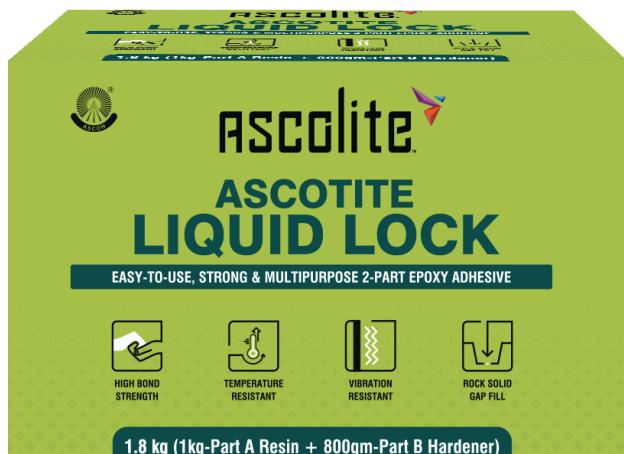

## PRODUCT INTRODUCTION

**ASCOTITE LIQUID LOCK** is high-strength 2-part medium viscous epoxy adhesive for bonding small or medium areas of different kinds of substrates like metal, wood, concrete and stone etc. It is an ideal product for bonding most materials together.

<b>RECOMMENDED APPLICATIONS</b>	<b>02</b>
<b>TECHNICAL PROPERTIES</b>	<b>02</b>
<b>PRODUCT KEY FEATURES</b>	<b>02</b>
<b>APPLICATION METHODS</b>	<b>03</b>
<b>SURFACE PREPARATION</b>	<b>03</b>
<b>MIXING</b>	<b>03</b>
<b>APPLICATION</b>	<b>03</b>
<b>PACKAGING</b>	<b>03</b>
<b>STORAGE &amp; SHELF LIFE</b>	<b>03</b>
<b>CLEANING</b>	<b>03</b>
<b>LIMITATIONS</b>	<b>03</b>

Version 1 : March 2024

## KEY FEATURES

1. Economical and easy to apply
2. Bonds a wide variety of materials
3. Excellent resistance to static and dynamic loads
4. High mechanical resistance
5. Excellent bond and tensile strengths
6. Long pot life
7. Chemical resistant

## RECOMMENDED APPLICATIONS

1. Metals
2. Wood/timber products
3. Natural and artificial stone
4. Concrete
5. Ceramic
6. Glass
7. Jewellery

## TECHNICAL PROPERTIES

ASTM D 2196 , ASTM D 2471, ASTM D 5895, ASTM D 1002

<b>Appearance</b>	Resin : Clear, viscous ; Hardener : Light yellow, viscous
<b>Chemical Base</b>	Epoxy resin ; Polyamide hardener
<b>Mixing Ratio</b>	Resin : Hardener = 1.0 : 0.8 (by weight)
<b>Pot Life</b>	75 ± 15 minutes
<b>Density</b>	1.05 ± 0.1 gm/cm <sup>3</sup>
<b>Appearance/Color</b>	Pale Yellow / Clear
<b>Set to touch Dry</b>	up to 4 hours
<b>Compressive Strength (MPa)</b>	≥ 80
<b>Pull Off Strength ( MPa) ( 1 Day )</b>	≥ 1.5 ( Concrete Failure)
<b>Hardness, Shore D ( 7 Days)</b>	80

*The values obtained are from laboratory testing conditions and at 27 ± 2°C. On site tests may show slight variation due to site conditions.*

## APPLICATION METHODS:

### 1. Surface Preparation

The substrate must be clean, dry, sound and free of all contamination such as dirt, oil, grease, & coatings etc. which hinder an adhesion.

In many cases, surface roughening prior to bonding improves strength of bonded joint. It is generally advised when working with rubber and metals. Weak concrete must be removed and surface defects such as blowholes and voids must be fully exposed.

### 2. Mixing

Only mix the amount of material that can be used within the pot life. The resin and the hardener need to be mechanically mixed before use in the ratio of weight and/or volume in compliance with technical specifications until a homogeneous color is reached.

### 3. Application

It can easily applied with spatula or putty knife. A layer of adhesive should be 0.05 to 0.10 mm thick which normally impart the greatest lap shear strength to a joint.

### 4. Limitations

- i. Not suitable where a flexibility is required.
- ii. Not suitable for temperature above 80°C.
- iii. Does not perform well to some plastics such as polyethylene, polypropylene, etc.

### 5. Cleaning

Excess of product can be removed with suitable solvent based cleaner compatible with the substrates to bond. Application tools and dosing systems shall be cleaned before the product is hardened. Cured product can be removed only mechanically. Tools and equipment should be cleaned immediately after use with appropriate solvent.

### 6. Packaging

Available in 450 gm, 0.9 Kg & 1.8 Kg Set

### 7. Coverage

Depending on application

### 8. Storage & Shelf Life

Store in cool and dry warehouse condition. Do not expose to direct sunlight. **ASCOTITE LIQUID LOCK** epoxy adhesive components should be stored in their original, sealed containers at room temperature. Shelf life in these conditions is 12 months in unopened original containers.

### DISCLAIMER:

*While the technical details & recommendations contained in this document and the related details given by the representatives of the company correspond to the best of our knowledge & experience, all the above information must in any case be considered as merely indicative and subject to confirmation. Users are recommended to conduct a product suitability test before it is used at full scale. In any case, the consumer alone is entirely liable for any consequences resulting from using the product. For the most up-to-date TDS, please visit our website at [www.ascolite.in](http://www.ascolite.in). Our company policy is one of ongoing R&D; therefore, we reserve the right to update this information without prior notice at any time. As the correct identification of the problems, the quality of other materials used, on-site environmental conditions and the workmanship on-site are factors beyond our control, there is no express or implied guarantee/warranty as to the results achieved. The company assumes no liability or consequential damage arising from the use of our products for unsatisfactory results. Site visits are not a supervisory responsibility wherever provided. Suggestions made either verbally or in writing by the company may be followed, modified or rejected by the owner, engineer or contractor, since they are solely responsible for carrying out procedures appropriate to the site and appropriate to the specific application.*